



# HINUERA NATURAL STONE

## PURPOSE

Hinuera Natural Stone is supplied for use as veneer cladding, paving, window & door sills, stair treads, fire surrounds and internal decorative linings.

## EXPLANATION

Hinuera stone is a naturally occurring volcanic rock (Ignimbrite), quarried at Hinuera in the Waikato. It is graded into four categories based on the strength, hardness, appearance which ultimately defines its end use. It falls within the range for heavy cladding materials (refer section 1 NZS 3604).

Other processing such as cutting, kiln firing (to create different tones or highlight naturally occurring markings) or creating different surface finishes (Sawnstone and Splitstone) have no effect on the physical properties of the stone.



For further assistance please contact:

☎ 0800 446 8372

✉ john@businesstechnologies.co.nz

🌐 [www.hinuera.co.nz](http://www.hinuera.co.nz)



Category	Use						Light Reflectance Value	
	Veneer cladding	Paving	Window & door sills	Stair treads	Fire surrounds	Slips	Natural	Kiln Fired
Thickness	70, 90 mm	20, 25 mm	60 mm	40, 60 mm		25, 40 mm		
Ahi	✓					✓	42.53	25.18
Kaha		✓	✓	✓	✓	✓	42.90	
Select Statuary		✓	✓	✓	✓	✓	43.68	
Awa	✓					✓	46.12	31.14

## SCOPE AND LIMITATIONS OF USE

Scope	Limitations
<p><b>Location</b></p> <p>In all wind zones up to and including extra high as defined in NZS 3604:2011, or up to a calculated design wind pressure of 2.1 kPa.</p> <p>All exposure zones as defined in NZS 3604:2011.</p>	<p>➤ In exposure zone D and where the Hinuera stone is installed externally, the stone must be coated with HYDROL DB31 Silicone Water Repellent.</p>
<p><b>Building</b></p> <p>In connection with a primary structure that complies with the NZ building code or where the designer and/or installer have established that the existing building is suitable for the intended building work.</p> <p>As an external cladding.</p>	<p>➤ To be installed in accordance with section 9.2 E2/AS1 or over a waterproof rigid substrate where the stone may be adhered with an adhesive or be mechanically fixed.</p> <p>➤ Hinuera Stone slips must not be glued to plywood.</p>
<p>As an internal lining.</p>	<p>➤ To be installed over a rigid substrate where the stone may be glued with an adhesive or be mechanically fixed.</p> <p>➤ Hinuera Stone slips must not be glued to plywood.</p> <p>➤ In wet areas the rigid substrate must be impervious to moisture.</p>

## USEFUL INFORMATION

For information on the design, installation and maintenance of Hinuera Natural Stone and for our warranty refer to [www.hinuera.co.nz](http://www.hinuera.co.nz).

## CONDITIONS OF USE

- › The Hinuera Stone must be installed by a qualified brick layer or stone mason.
- › Bagged trade mortar, using town-supply or rainwater, must be used to install the stone.

## PERFORMANCE CLAIMS


If designed, installed and maintained in accordance with all Hinuera Natural Stone Ltd requirements, Hinuera Natural Stone will comply with or contribute to compliance with the following performance claims:

NZ Building Code clauses	BASIS OF COMPLIANCE	
	Compliance statement	Demonstrated by
<b>B1 Structure</b> B1.3.1, B1.3.2, B1.3.3 (a, f, h, j, q)	ACCEPTABLE SOLUTION B1/AS1	› Meets the requirements of NZS 4210:2001 which is cited in B1/AS1.
<b>B2 Durability</b> B2.3.1 (b)	ALTERNATIVE SOLUTION	› Meets the requirements of B1/AS1. › BRANZ assessment of resistance of Hineura Stone to salt attack [BRANZ, 19/07/2005].
<b>C3 Fire affecting areas beyond the source</b> C3.4 (a), C3.7 (a)	ACCEPTABLE SOLUTION C/AS2 1 <sup>st</sup> edition, June 2019	› Ignimbrite Rock is non-combustible. › Non-combustible products have a material group number of 1.
<b>D1 Access Routes</b> D1.3.3 (d)	ACCEPTABLE SOLUTION D1/AS1	› Tested to AS/NZS 4586:2004 and achieves mean coefficient of friction of 0.82 [Safety Step, 2018].
<b>E2 External Moisture</b> E2.3.2, E2.3.5, E2.3.6, E2.3.7 (a, b, c)	ACCEPTABLE SOLUTION E2/AS1	› Hinuera Natural Stone is directly comparable to brick.
<b>F2 Hazardous Building Materials</b> F2.3.1	ACCEPTABLE SOLUTION	› Does not contain or emit harmful materials.

## SOURCES OF INFORMATION

- › BRANZ. (19/07/2005). *DC 0980. Resistance of Hinuera Stone to Salt Attack: Stage 111 – Durability after Hydrol Sealing.*
- › Hinuera. (April 2017). *Technical Guide. Version 7.*
- › Safety Step (NZ) Ltd. (2018). *Slip Resistance Test Report.* Tested to AS/NZS 4586:2004.

1. Where a standard is referenced it is to be read as amended by the acceptable solution or verification method as applicable.
2. Sources of information also include the Building Act 2004 and its regulations, including the Building Code (Schedule 1 of the Building Regulations 1992), Acceptable Solutions and Verification Methods, and relevant cited standards.
3. The quality and assurance that the supplied products meet the performance claims stated in this pass™ are the responsibility of the company that is the holder of this pass™.

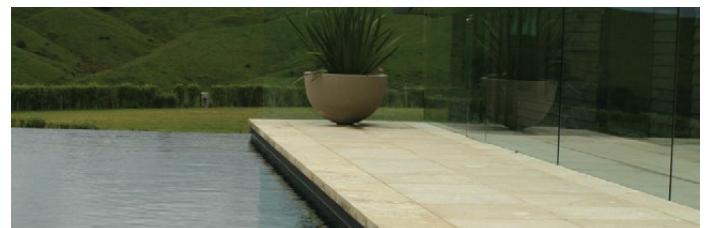

Scan or click this QR code for a full download of Compliance Documentation for this pass™.

[www.hinuera.co.nz/trade-resources](http://www.hinuera.co.nz/trade-resources)



Hinuera confirms that if Hinuera Natural Stone is used in accordance with the requirements of this pass™ the product will comply with the NZ Building Code and other performance claims set out in this pass™ and the company has met all of its obligations under s14 G of the Building Act.

**Date of first issue:** 03/06/2020

**Date of current issue:** 15/03/2023

**NZBN:** 9429033642635

*Kevin Brunton*

Kevin Brunton, Technical Director, TBB confirms that this pass has been prepared on behalf of Hinuera and in accordance with MBIE PTS guidelines and in accordance with the TBB pass™ process which is within the scope of TBB's ISO 9001 certification.

9606D66ADE51EA6CCC25850D00239F99